



# G2G LED WALL WASHER 1C SERIES

This product is mainly used for decorating and highlighting in building frame, garden, etc. It can work in independent mode and DMX mode, which can generate various color changing effects, such as flashing, fading, steady, seven color jumping synchronously etc.

DMX256 class gray degree dimmer, DMX programmable (thousands of effects available if many lights being connected together);

\*\*\*The manual is based on the LWW series, please skip B&C parts when it is LFL series.

## A. Specification

### A-1. Structure

Materials of Shell: Aluminum alloy  
 Rotary angle: 150°(Vertical)  
 Input Voltage: 120V/240V AC  
 Operating Voltage: 24V DC  
 Protecting Rating: IP65  
 Operating Temperature: -20°C~40°C



LWW-1C-36P

### A-2. Model Configuration Table


Model No.	LED Color	LED Quantity	Power Consumption	Beam Angle	Size	Weight	✓
G2GLWW-1-36P	RGB/R/G/B/ WW/NW/W	36	40 WATTS	10°/20°/45°/15x50°	L330xW150xH210mm	4.3kg±5%	

## B. Working Mode

B-1. Independent Mode: Choose the build-in programs via the buttons on the back of the head

B-2. DMX Mode: International standard DMX512 signal.


B-3. Master/Slave Mode: Auto online and synchro working.

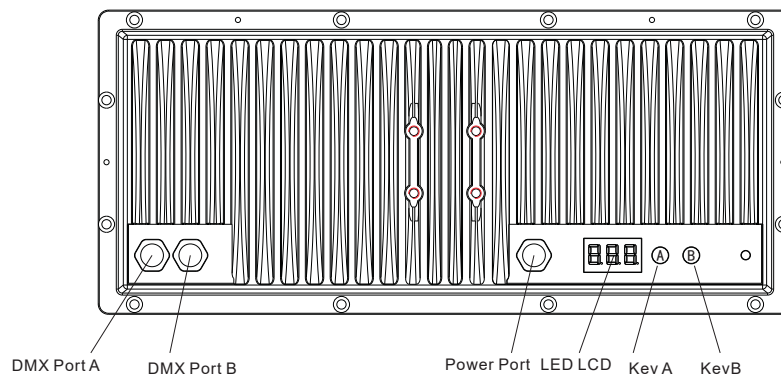

## C. Function & Setup

### C-1. Independent Mode

After pressing A four times (the first three times is the setup on DMX address) or B directly, light enter into independent mode; the digital LEDs show PXY, press A once, active digital LEDs move backward, you can choose function via X and parameter via Y; Press B, the corresponding flash digital LED increases one bit (range: 1~9).

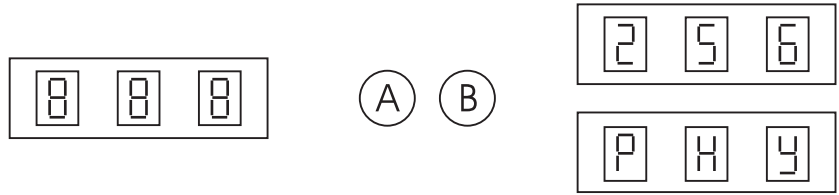

X refers to functions (the value between 1 to 9), Y refers to value of speed and gray degree for the functions (the value between 1 to 9). When pressing button, please wait for about 10 sec, then you can exit the mode of adjustment function, the digital LED stop flashing and data recorded.

Function and parameter sheet:

X value	Y value
1-static red	1~9 class gray degree
2-static green	1~9 class gray degree
3-static yellow	1~9 class gray degree
4-static blue	1~9 class gray degree
5-static purple	1~9 class gray degree
6-static cyan	1~9 class gray degree

X value	Y value
7-static white	1~9 class gray degree
8-multicolor changing	1~9 class speed
9-single fading	1~9 class speed
A-multicolor fading	1~9 class speed
B-multicolor flashing	1~9 class speed
C-autorun	1~9 times circle

## C-2. DMX Mode

### 1. DMX Addressing

When the digital LED is not flashing, press A, digital LED begin to flash, press A once, active digital LEDs moves backward, you can start to edit the second digital LED; Press B, the corresponding flash digital LED increase one bit (the values between 1 to 9).

### 2. DMX Channel instruction-3 Channels available as sheet:

CHANNEL 1		CHANNEL 2		CHANNEL 3	
Data	Function	Data	Function	Data	Function
0~255	Brightness of Red	0~255	Brightness of Green	0~255	Brightness of Blue

\*\*\*Enter or quit DMX mode automatically once detecting valid signal!!!


## C-3. Master/Slave Mode

Choose any one light as the master for attaining auto online function, the operations are as below: firstly, set the address of master as 001, others are set as slave (address can be any one except 001); Change function of the master (001) light, then all lights will work synchronously;


## D. Photometrics Parameters

### D-1. Cadela Distribution


LWW-1-36P Beam Angle: 10°

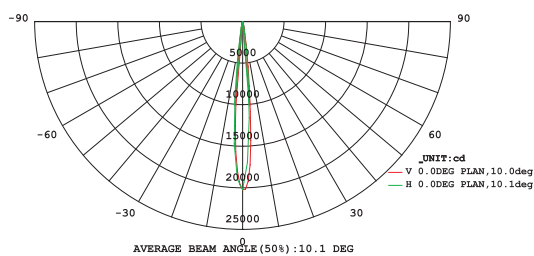


RGB

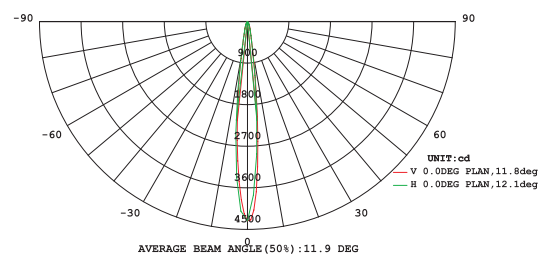

Red

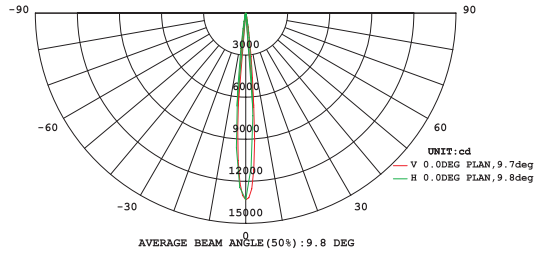


Green

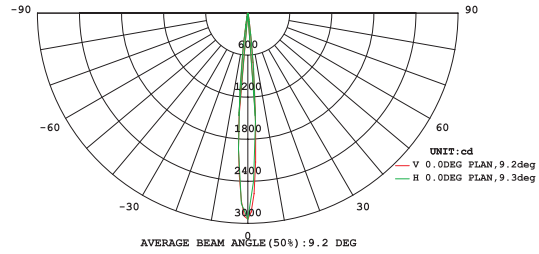


Blue

D-2. Illuminance At A Distance


LWW-1-36P Beam Angle: 10°

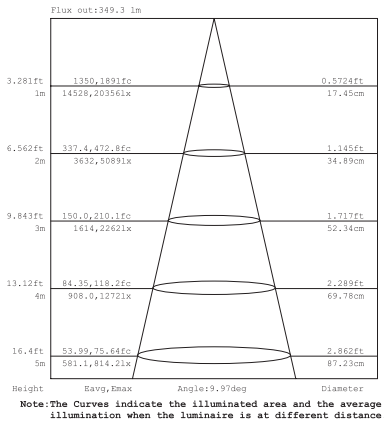


RGB

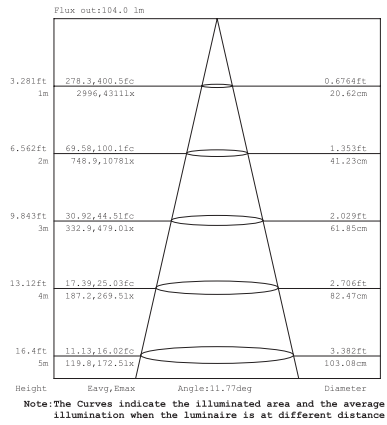

Red


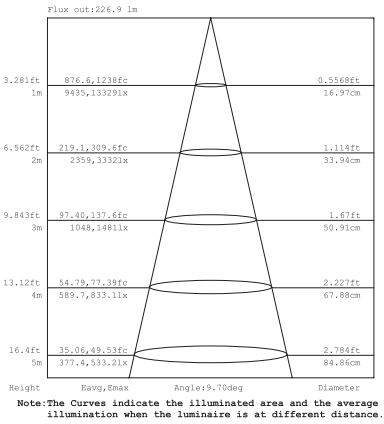


Green

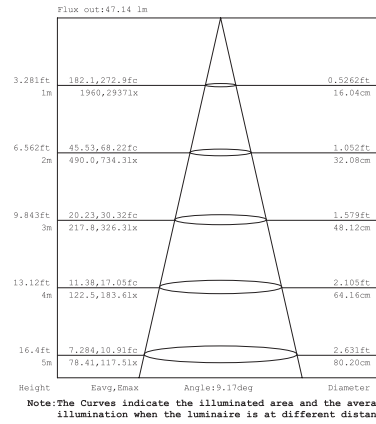


Blue

E. Dimension Drawing

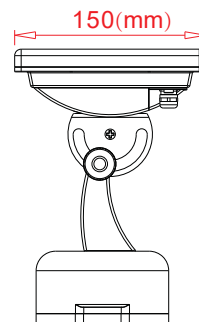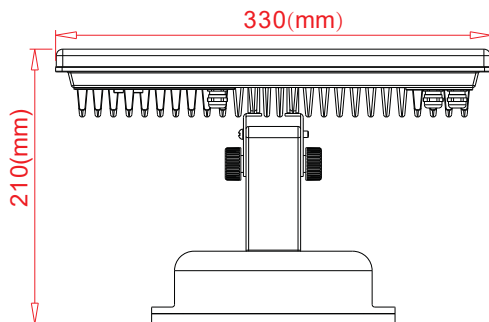

## F. Installation Drawing

Fix the brackets via M6 pr M8 tapping screw, mounting size as below:

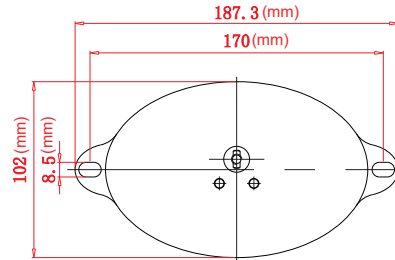


## G.Connection

G-1. Signal max connection is 100m, every 100m or 60pcs fixtures needs a signal amplifier.

G-2. Optional controller: Talent II, Sunlite, DMX-192C, Madrix and other DMX controllers.

Talent II

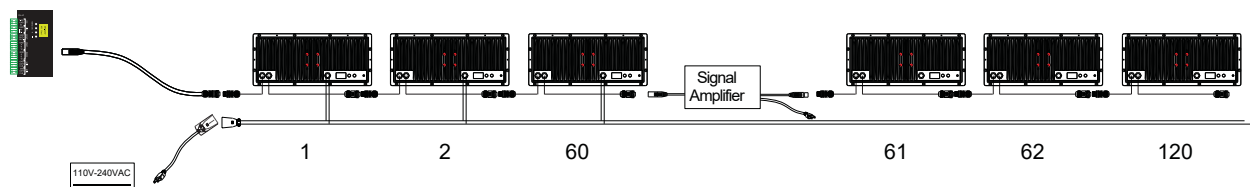

## H. Waterproof Treatment

The signal output connector XLR-3 of the last fixture of each series must be sealed with a 20mm thermal shrinking tube(-1), blow and shrink it with a hair driers; thence wrapped with waterproof tape (auto-adhesive, please refer to below instruction for operation) on both side; Blow the second 25mm shrink tube(-2) at last so as to protect waterproof tape under sunshine and guarantee the waterproof validity.

CAUTION	1.Connector	2.without connector	3.Cut the wire	CAUTION
	Shrink tube-1 D:20mm	Waterproof tape (Auto-Adhesive)	Shrink tube-2 D:25mm	
	Step 1	Step 2	Step 3	

The tape should seal the shrink tube-1 very well on each side → The shrink tube-2 should cover tape totally for sunshine-protection

\*\*\*Neglect on action of the above treatment will lead to failure of waterproof and proper work of the lights!!!  
 \*\*\*Water can be sucked into the fixture via interior pipe of the cables after light be switched off, due to minus pressure!!!

\*\*\* Power connector should be treated in the same way if available!!!

\*\*\* IP68 connector does not require above treatment, but you connect a threaded twist quite well to prevent operational errors lead to joint water