



# G2G ArRay Series

Sign Box Lighting  
Easier Than Ever Before

## SPECIFICATIONS

Luminous Efficacy	ArRay DF ECO	134 LM/W
	ArRay SF	173 LM/W
Power	ArRay DF ECO	5.4W/FT
	ArRay SF	3W/FT
Max Mods (Series)	ArRay DF ECO	Full 54W load
	ArRay SF	Full 30W load
LEDs Per Module	ArRay DF ECO	6
	ArRay SF	3
CT	7500K	
CRI	>70	
Protection	IP66 wet-Location	
Operating Temp	-40°~ +60 °C	
Warranty	7 Years	
LED	SMD 2835	
Packaging	60 modules per case	



IP66 cUL<sup>us</sup>  
E344189

- Constant Voltage Technology
- UV or IR Protected
- L70 rating of 50,000 hours

## RECOMMENDED COVERAGE CHART


ArRay DF ECO	Depth	8"	10"	12"	14"	16"
	Spacing	12"	12"	12"	12-15"	12-15"
ArRay SF	Depth	4"	5"	6"	7"	8"
	Spacing	12"	12"	12-15"	12-15"	12-15"

## OPTIONS

Model	Voltage	Power	Current	Modules Per Ft	Lumens	Qty 60 Power Supply	Viewing Angle
ArRay DF ECO	12VDC	0.9W/Module	75mA	3	120Lm/Module	66 Modules	120°
ArRay SF	12VDC	1 W/Module	86mA	3	173Lm/Module	60 Modules	160°

## DRAWINGS

ArRay DF ECO

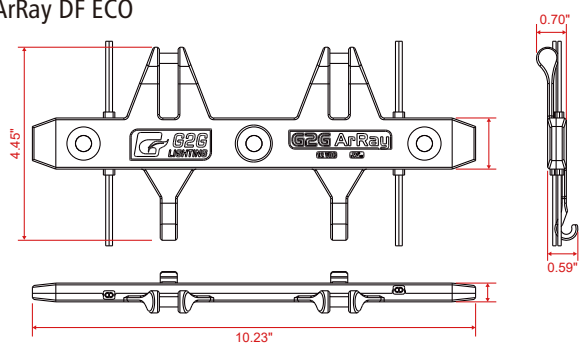

ArRay SF

