




WOW Series

Channel Letter Solutions

SPECIFICATIONS

Viewing Angle	160° Optics
Input Voltage	12VDC
Watts	0.72w/mod (1.44w/ft.)
Modules/Foot	2/ft. fully stretched
Protection Grade	IP67 water proof
Packaging	Anti-static bag, 75 modules (37.5 ft)/bag 10 bags/outer carton
Warranty	5 Year (Product) / 5 Year (Labor)
Operating Temp.	-40° ~ +60 °C / -40° ~ +140 °F
Storage Temp.	-40° ~ -70 °C / -40° ~ +158 °F
Cascade	30 mods single-ended power feed 60 mods double-ended power feed

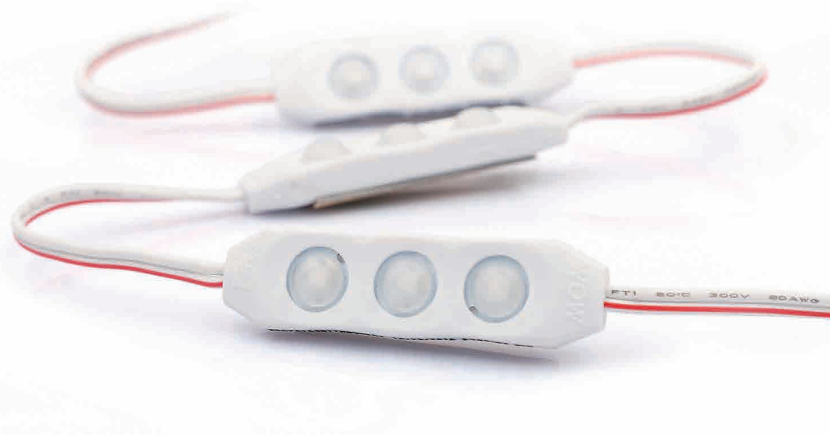

- Designed for small channel letters and tight space
- UV or IR Protected
- L80 rating of 50,000 hours
- 3M double face tape and mechanical mounting options

OPTIONS

Model	Color Temp	Lumens
WOW White	4200K/6300K/7500K	70 lm/mod (140lm/ft.)
WOW Red	RED	17.5 lm/mod (35lm/ft.)
WOW Blue	BLUE	15 lm/mod (30lm/ft.)
WOW Green	GREEN	54 lm/mod (108lm/ft.)
WOW (Amber) Yellow	AMBER YELLOW	69 lm/mod (138lm/ft.)

Additional color temps available upon special order (MOQs Apply)

DRAWINGS

